
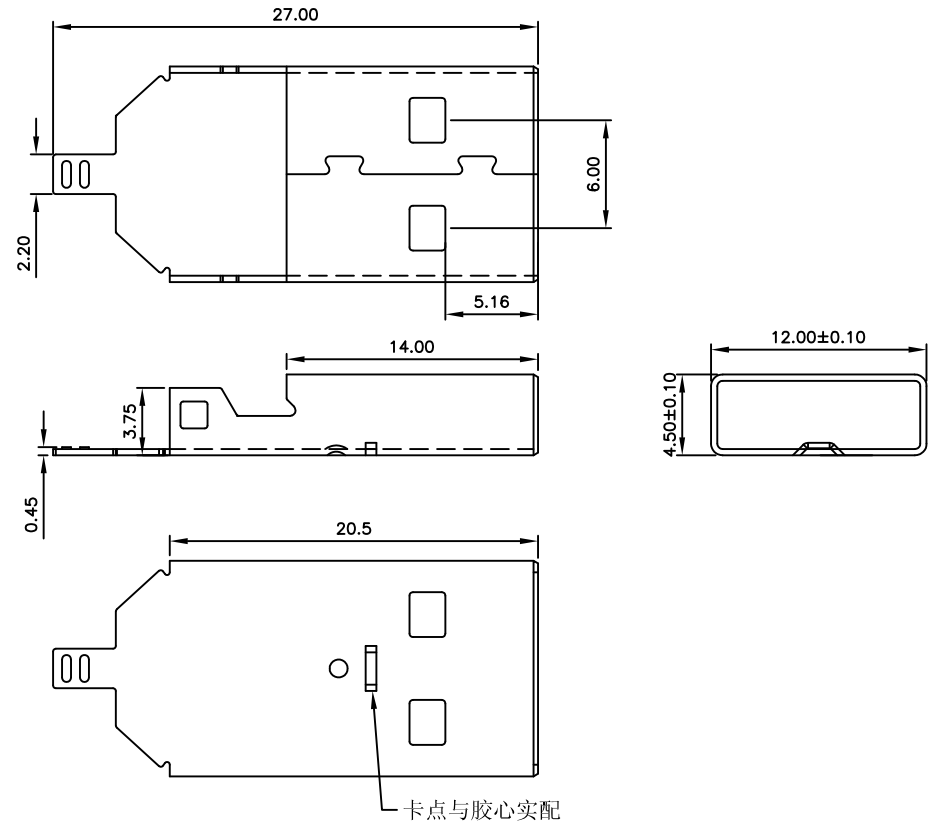


REV.	NOTES	DATE
A	RELEASED	2017/06/27

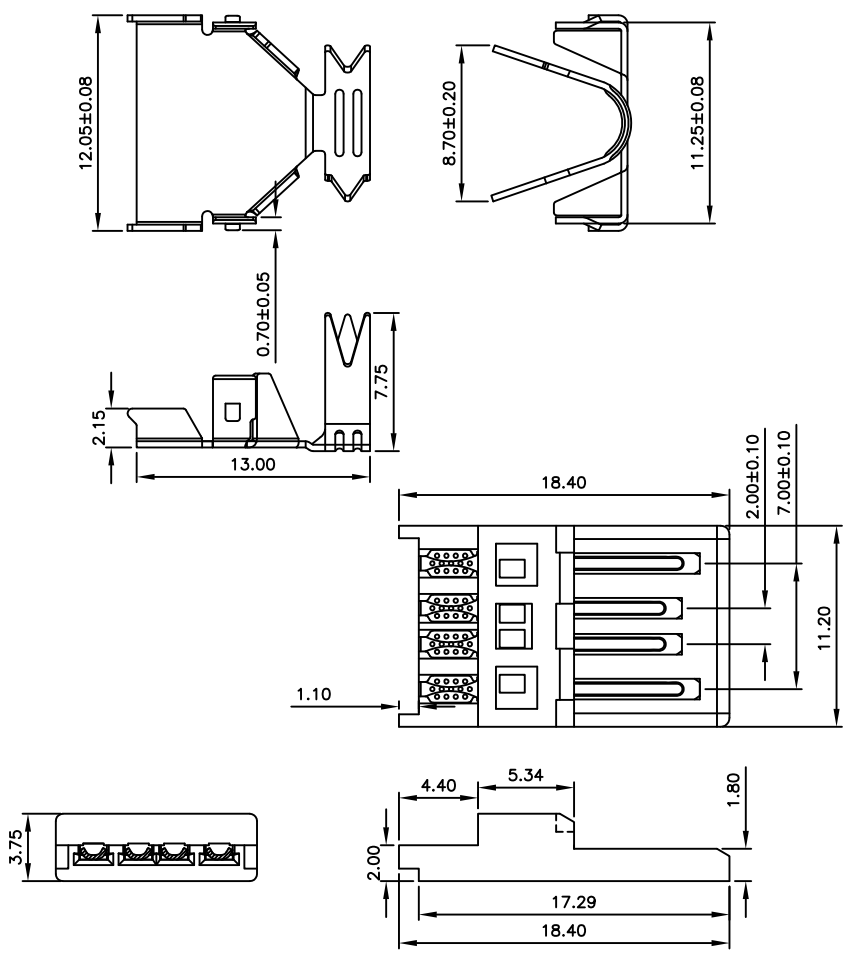

- NOTE:
- Material
 - Terminal: COPPER ALLOY
 - Housing: PBT, UL94V-0 BLACK
 - Shell: spcc
 - Electrical
 - Current rating: 1.5A;
 - Rated Voltage: 30V DC;
 - TEMPERATURE: -55°C TO +85°C;
 - Contact Resistance: 30mΩ MAX;
 - Insulation Resistance: 1000MΩ MIN AT DC 500V;
 - Dielectric Withstanding Voltage: apply 500VAC ;

DIMENSIONS TOLERANCE METRIC	
X	±0.3
XX	±0.2
XXX	±0.1
X.XXX	±0.05
ANGLES	
X	±1°
X.X	±0.5°

4	長外壳	SPCC	鍍銀
3	短外壳	SPCC	鍍銀
2	端子	C2680	接觸點 鍍金G/F 焊腳 鍍錫
1	塑膠	PBT	黑色 UL94V-0
NO.	PART NAME	MATERIAL	DESCRIPTION
單位(UNIT)		東莞翊豐精密五金有限公司	
數量(QTY)		圖名(NAME)	
材料(MTL)		USB2.0 A/M 短体大线夹三件套	
處理(FINISH)		料號(PART NUMBER) AAUS+0204-0627	
繪圖(DRAW)		圖號(DRAW NUMBER)	
設計(DE'N)		圖檔(FILE NAME .DWG)	
審核(CH'K)		比例(SCALE)	1/1
核准(APP'D)		圖紙(SIZE)	A4
		頁次(SHEET)	1
		版次(REV.)	A