


REV.	NOTES	DATE
A	RELEASED	2017/06/08

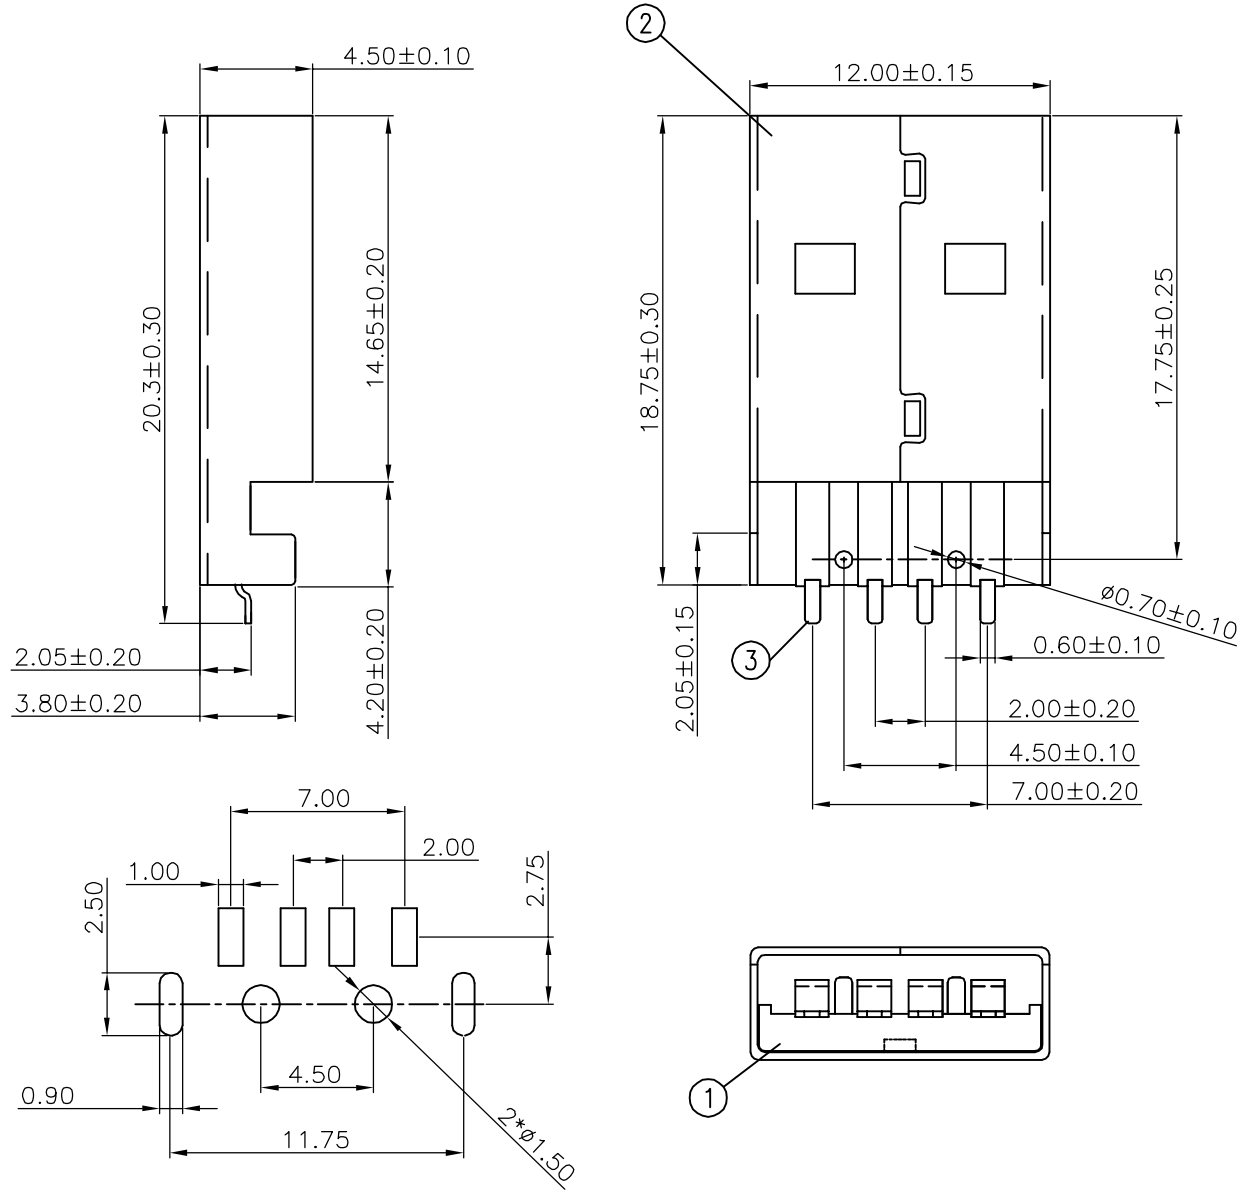

NOTES:

- MATERIAL:
  - Housing:thermoplastic plastics
  - terminals:Copper Alloy  
Gold plated in contact area:  
Tin plated in termination  
Nickel Plated overall
  - Shell:Steel&Copper Alloy  
Nickel Plated overall
- ELECTRICAL CHARACTERISTICS:
  - Rating Current :1.5 Ampere
  - Rating Voltage :30 V Max
  - Contact Resistance:30 Milli ohms
  - Insulation Resistance:1000 Mega ohms Min.
- MECHANICAL CHARACTERISTICS:
  - Connector Mating force: 35N MAX(3.57KgF)
  - Connector Unmating force:10N min(1.02KgF)
  - Durability:1500Cycles.
- ENVIRONMENT CHARACTERISTICS:
  - Operating temperature:-0°C to +50°C
  - Storage temperature:-20°C to +60°C

DIMENSIONS TOLERANCE METRIC

X :±0.3  
X.X :±0.20  
X.XX :±0.10  
X.XXX :±0.05

ANGLES  
X :±1°  
X.X :±0.5°

③	Contact	C2680	Au Plated-NICKEL
②	Shell	SPCC	NICKEL PLATED
①	HOUSING	PA-9T+30%G/F	UL94V-0 Black
NO.	PART NAME	MATERIAL	DESCRIPTION
單位(UNIT)		東莞翊豐精密五金有限公司	
數量(QTY)			
材料(MTL)			
處理(FINISH)			
繪圖(DRAW)		圖名(NAME) USB AM 沉板 SMT 外壳剪脚3.8	
設計(DE'N)		料號(PART NUMBER)	AAUS+U218-021X
審核(CH'K)		圖號(DRAW NUMBER)	
核准(APP'D)		圖檔(FILE NAME .DWG)	
比例(SCALE)	1/1	圖紙(SIZE)	A4
頁次(SHEET)	1/2	版次(REV.)	A