
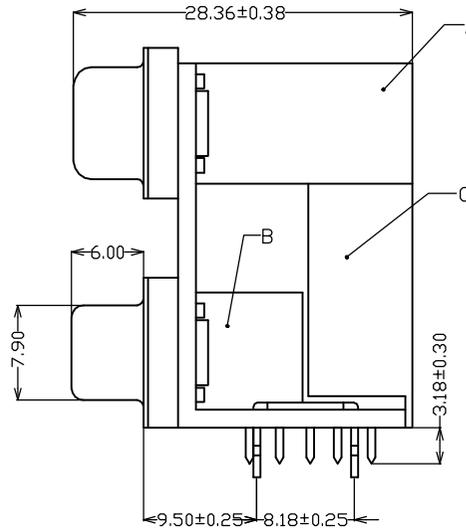


| REV. | NOTES | DATE |
|------|----------|------------|
| A | RELEASED | 2017/10/12 |

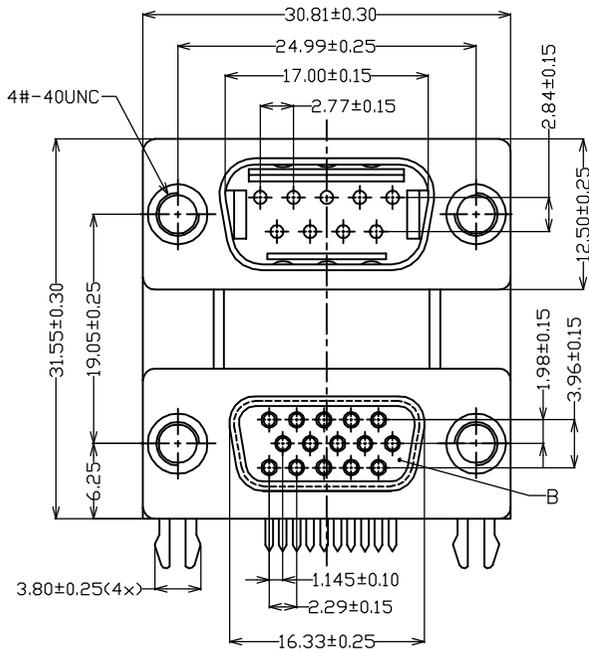

MATERIALS



- 1.INSULATION : P.B.T+25% G.F (UL 94V-0).
- 2.CONTACT: Brass, Gold/Tin Plated
- 3.SHELL : STEEL,Nicket Plated
- 4.BOARD LOCK: SPCC
- 5.SQUARE RIVET: COPPER ALLOY
- 6.SHELL BRACKET: SPCC

SPECIFICATION

- 1.CURRENT RATING : 5 AMPS. MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE : 100V AC R.M.S. FOR ONE MINUTE.
- 3.INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- 4.CONTACT RESISTANCE : 30m OHMS MAX.
- 5.OPERATING TEMPERATURE : -55°C TO +105°C.
- 6.DURABILITY : 500 CYCLES.

ORDER INFORMATION

| PART NO | A | B | C |
|------------------|-------|------|-------|
| AA20+9160-1259L1 | GREEN | BLUE | BLACK |

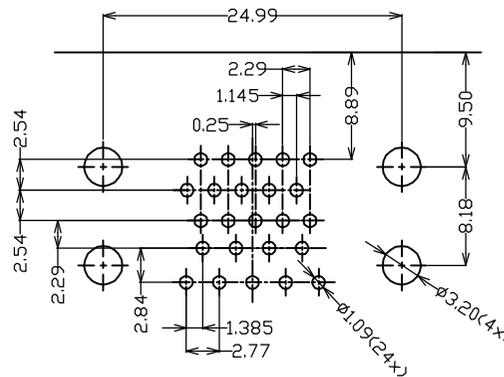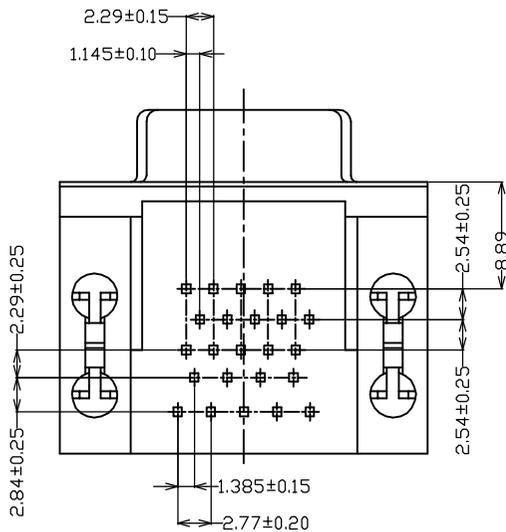

RECOMMEND P.C.B. LAYOUT
BOTTOM VIEW

DIMENSIONS TOLERANCE

METRIC
 .0= ±.38
 .00= ±.25
 .000= ±.15
 .0000= ±
 ANG.= ± 2°

| | |
|------------|----------|
| 單位(UNITS) | mm |
| 數量(QT'Y) | N/A |
| 材料(MT'L) | SEE NOTE |
| 處理(FINISH) | SEE NOTE |

繪圖(DRAW)

設計(DE'N)

審核(CH'K)

核准(APP'D)

東莞翊豐精密五金有限公司

圖名(NAME)

9公+15母8.89又鉚半金縮9 RoHS

料號(PART NUMBER)

AA20+9160-1259L1

圖號(DRAW NUMBER)

圖檔(FILE NAME .DWG)

比例(SCALE)

1/1

圖紙(SIZE)

A4

頁次(SHEET)

1

版次(REV.)

A